

# G 6/4" ELECTRIC HEATING ELEMENTS with thermostatic head and contactor

Output: 2 - 3 kW

Application: hot water storage tanks, thermal stores




## ETT-D2 Electric Heating Elements

**Nickel-plated** resistance heating elements with **a thermostatic head** and contactor, intended for heating of static heating water or antifreeze fluid in thermal stores or for drinking water heating in hot water storage tanks. These elements are not intended for stainless steel tanks. They **are suitable for drinking water heating** in hot water storage tanks.

They are designed to be installed in a horizontal position so that the element is completely immersed, the cable gland downwards. They are power supplied by a 5-core cable wired to a terminal box or fuse board.

The heating element features one input for a Ripple control signal and one for master heating system controller.

## DIMENSIONS, MODELS

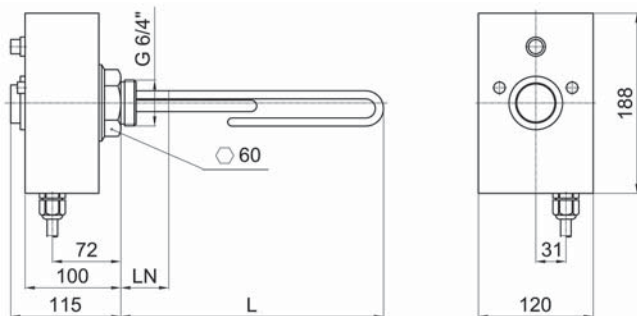


MODEL		ETT-D2 2.0	ETT-D2 3.0
NOMINAL OUTPUT	kW	2.0	3.0
NOMINAL CURRENT	A	8.7	13.0
ELEMENT LENGTH (L)	mm	315	370
NON-HEATING END LENGTH (LN)	mm	100	100
CODE	--	19703	19710

## TECHNICAL DATA

HEATING ELEMENT CONNECTION	nickel plated copper G 6/4" M
HEXAGON WITH G 6/4" THREAD	nickel plated brass
CASE	aluminium alloy
POWER SUPPLY	230V 50 Hz
IP RATING	IP 54
PROTECTION CLASS BY EN 61140 ed.2	I
<b>OPERATING THERMOSTAT</b>	capillary type, adjustable
SWITCH-OVER CONTACT	16 A
TEMPERATURE ADJUSTMENT RANGE	from 0 ± 5 °C to 90 ± 3 °C
TEMPERATURE ADJUSTMENT METHOD	rotating knob
SWITCHING DIFFERENCE LOWER LIMIT	5 ± 1.5 °C about 15 °C - frost protection
UPPER LIMIT	cca 60 °C - for HW storage tanks
<b>SAFETY THERMOSTAT</b>	capillary type, fixed setting
SWITCHING TEMP.	99 +0/-10 °C
RESET	manual, after temperature drops below 40 °C
<b>CONTACTOR</b>	AC1 : 20 A / 690 V, 1Z
COIL VOLTAGE	AC 220 - 240 V
FREQUENCY	50 Hz

# ELECTRIC WIRING





1/N/PE AC 230V

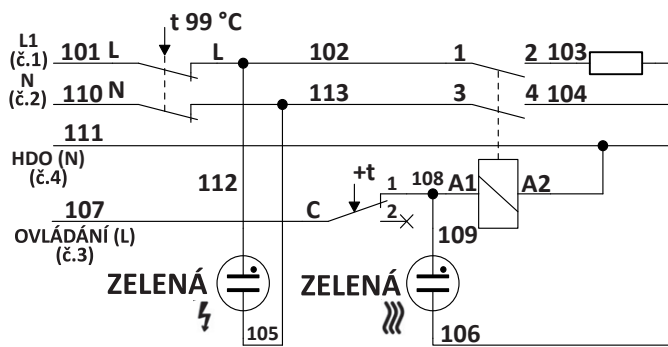

## POWER CABLE

CROSS SECTION	5 × 1.5 mm <sup>2</sup>
LENGTH	2 m
CABLE GLAND	Pg11

## WIRING EXAMPLES

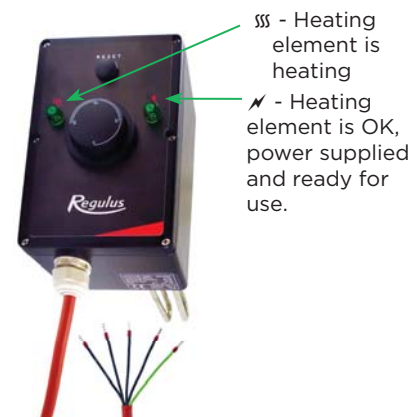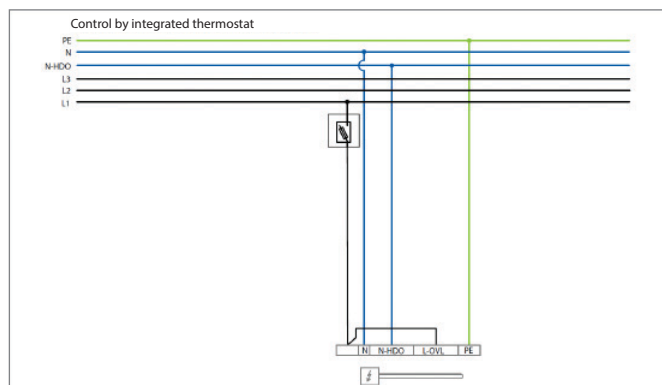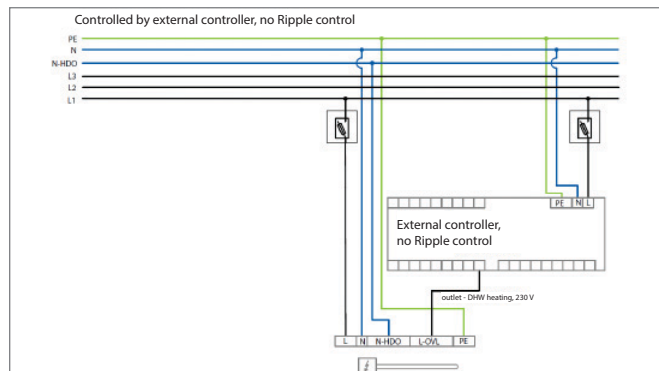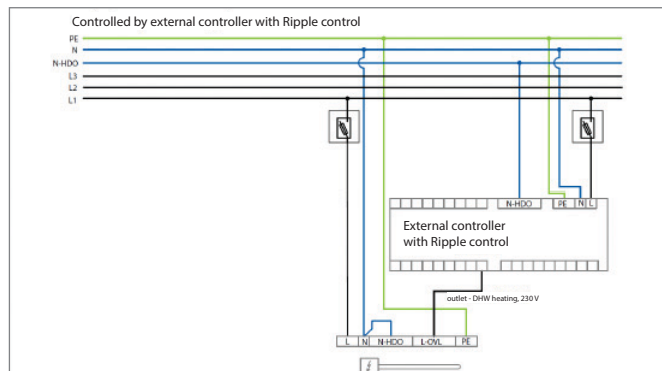

☺ - Heating element is heating  
 ⚡ - Heating element is OK, power supplied and ready for use.