

DATA SHEET

Flow FilterBall – ball valve with integrated filter




code 17065, 17066, 17067, 17068, 17069

Main Features	
Application	Intended for tight closure or opening of working fluid flow and impurities filtering.
Description	Ball valve with integrated strainer.
Control	Manual opening/closing.
Working fluid	Drinking water, water, antifreeze fluid for heating systems, heat pumps and solar thermal systems.
Maintenance	For strainer cleaning, close the ball valve completely, unscrew the lid and remove the strainer.
Installation	Horizontal or vertical, always respect the flow direction marked by an arrow on the housing; for proper functioning the valve shall be fully open during operation and fully closed during maintenance and strainer cleaning.

Name	Code	Connection size	
Flow FilterBall 3/4" F – lever	17065	G 3/4" F	
Flow FilterBall 1" F – lever	17066	G 1" F	
Flow FilterBall 5/4" F – lever	17067	G 5/4" F	
Flow FilterBall 6/4" F – lever	17068	G 6/4" F	
Flow FilterBall 2" F – lever	17069	G 2" F	

Tel.: +420 241 765 191

Fax: +420 241 763 976

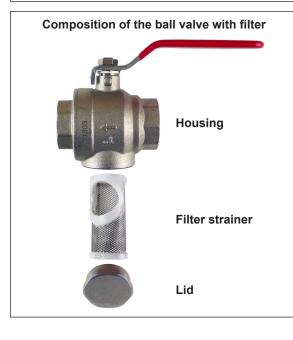


Technical Data	
Max. working pressure	16 bar
Max. working temperature	–20 °C to 100 °C
Filter mesh size	0.6 mm

Materials			
Valve housing	nickel-plated brass		
Lid	nickel-plated brass		
Filter strainer	stainless steel		
O-ring (lid)	EPDM		
Lid gasket	EPDM		
Closing ball	chrome-plated brass		
Ball seal	PTFE		
Spindle	brass		
Spindle seal	PTFE		
Packing nut	brass		
Lever	steel		




DATA SHEET

Flow FilterBall – ball valve with integrated filter

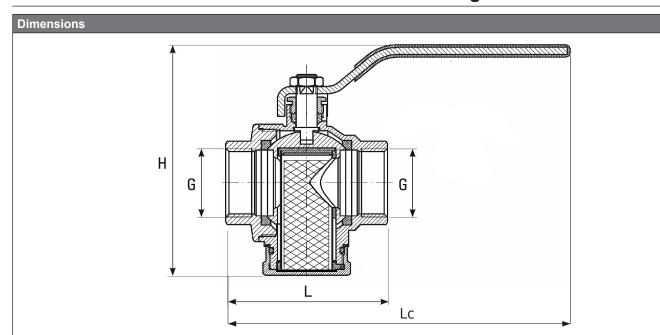

Code	Dimensions				DN	Kvs	Weight
	G	Lc [mm]	L [mm]	H [mm]	[mm]	[m³/h]	[kg]
17065	3/4" F	140	65	100	20	9.5	0.6
17066	1" F	146	78	106	25	12.4	0.8
17067	5/4" F	182	87	129	32	23.1	1.3
17068	6/4" F	192	108	144	40	32.2	2.0
17069	2" F	310	127	188	50	52.4	3.9

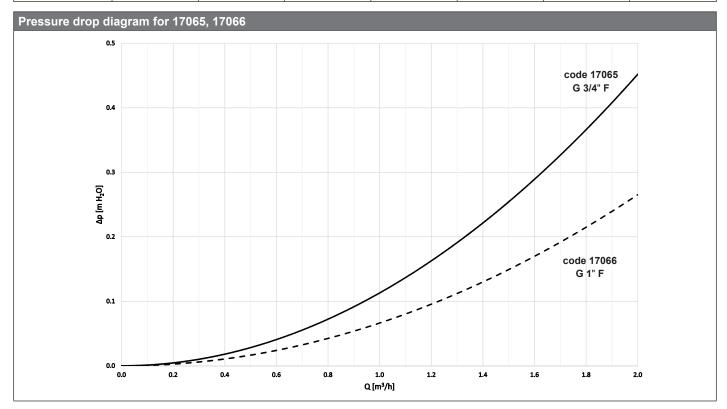


Tel.: +420 241 765 191

Fax: +420 241 763 976



DATA SHEET

Flow FilterBall – ball valve with integrated filter

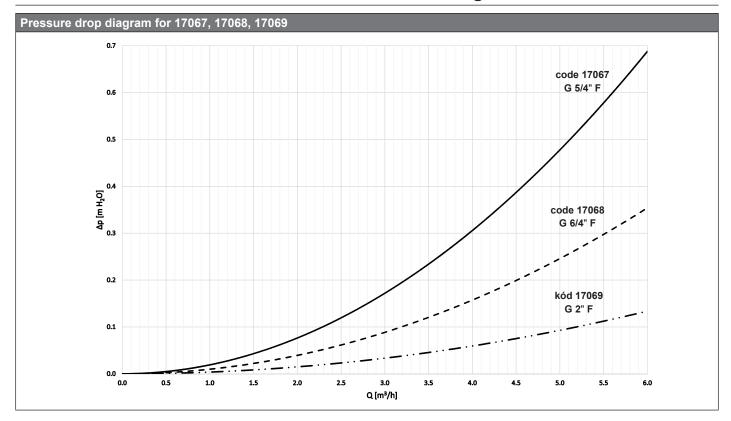

Tel.: +420 241 765 191

Fax: +420 241 763 976