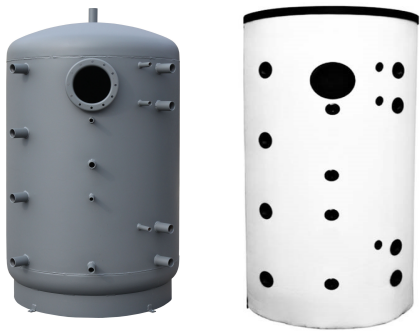


## DATA SHEET

### PSWF 1500 N+Thermal Store

	Main Features	
	Application	Storage and subsequent distribution of thermal energy from solid-fuel boilers, heat pumps or other heat sources; the tank is fitted with a solar heat exchanger and a flanged opening that permits installation of a DHW tube heat exchanger or connecting a solar thermal system
	Working fluid	water, water-glycol mixture (max. 1:1), water-glycerine mixture (max. 2:1), thermal oil
	Storage tank code	15234
	Insulation code	19350

#### Energy Efficiency Data (as per EC Regulation No. 812/2013)

	valid for a tank with insulation
Energy efficiency class	neudává se
Static loss	167 W
Storage volume	1476 l

#### Technical data

Total storage tank volume	1498 l
Fluid volume in tank	1476 l
Heat exchanger volume	22.0 l
Heat exchanger surface area	4.0 m <sup>2</sup>
Max. working temperature in storage tank	95 °C
Max. working temperature in heat exchanger	110 °C
Max. working pressure in storage tank	3 bar
Max. working pressure in heat exchanger	10 bar
Storage tank diameter	1100 mm
Storage tank diameter with insulation	1300 mm
Storage tank overall height	1885 mm
Tipping height without insulation	1965 mm
Storage tank perimeter insulation thickness	100 mm
Storage tank bottom insulation thickness	50 mm
Storage tank top insulation thickness	100 mm
Empty weight without insulation	265 kg

#### Materials

Storage tank material	S235JR
Storage tank perimeter insulation	fleece
Storage tank outer surface insulation	hard polystyrene
Top and bottom storage tank insulation	fleece
Solar heat exchanger	S235JR+N

PSWF 1500 N+Thermal Store

Accessories	
Electrical heating element	ETT-A, C, D, F, P, M
Heating element max. length	955 mm
Blind flange	code 6230
Blind flange for heat exchanger	code 6231 / 6232
Tube heat exchanger	max. area 4.5 m <sup>2</sup>

Dimensions																																																																																																	
	<p><b>TAPPINGS</b></p> <table border="1"> <thead> <tr> <th>pos.</th> <th>description</th> <th>connection</th> <th>height [mm]</th> </tr> </thead> <tbody> <tr> <td colspan="4"><b>Heat sources</b></td> </tr> <tr> <td>B1</td> <td>Supply from heat source</td> <td>G 6/4" F</td> <td>1475</td> </tr> <tr> <td>B2</td> <td>Return to heat source</td> <td>G 6/4" F</td> <td>335</td> </tr> <tr> <td colspan="4"><b>Heating system</b></td> </tr> <tr> <td>H1</td> <td>Supply to heat sink</td> <td>G 6/4" F</td> <td>1885</td> </tr> <tr> <td>H2</td> <td>Return from heat sink</td> <td>G 6/4" F</td> <td>335</td> </tr> <tr> <td colspan="4"><b>Control and safety</b></td> </tr> <tr> <td>C1</td> <td>Temperature sensor</td> <td>G 1/2" F</td> <td>1490</td> </tr> <tr> <td>C2</td> <td>Temperature sensor</td> <td>G 1/2" F</td> <td>735</td> </tr> <tr> <td>C3</td> <td>Temperature sensor</td> <td>G 1/2" F</td> <td>1175</td> </tr> <tr> <td>T</td> <td>Thermometer</td> <td>G 1/2" F</td> <td>1270</td> </tr> <tr> <td>P</td> <td>Safety valve</td> <td>G 1/2" F</td> <td>550</td> </tr> <tr> <td colspan="4"><b>Universal inlet/outlet</b></td> </tr> <tr> <td>U1</td> <td>Universal inlet/outlet</td> <td>G 6/4" F</td> <td>1475</td> </tr> <tr> <td>U2</td> <td>Universal inlet/outlet</td> <td>G 6/4" F</td> <td>535</td> </tr> <tr> <td>U3</td> <td>Universal inlet/outlet</td> <td>G 6/4" F</td> <td>1095</td> </tr> <tr> <td>U4</td> <td>Universal inlet/outlet</td> <td>G 6/4" F</td> <td>715</td> </tr> <tr> <td>U5</td> <td>Universal inlet/outlet</td> <td>G 6/4" F</td> <td>1255</td> </tr> <tr> <td colspan="4"><b>Solar thermal system</b></td> </tr> <tr> <td>X1</td> <td>Inlet from solar thermal collector</td> <td>G 1" F</td> <td>940</td> </tr> <tr> <td>X2</td> <td>Return to solar thermal collector</td> <td>G 1" F</td> <td>335</td> </tr> <tr> <td colspan="4"><b>Flanges</b></td> </tr> <tr> <td>L1</td> <td>Upper flange</td> <td>12 x M12</td> <td>1375</td> </tr> </tbody> </table>	pos.	description	connection	height [mm]	<b>Heat sources</b>				B1	Supply from heat source	G 6/4" F	1475	B2	Return to heat source	G 6/4" F	335	<b>Heating system</b>				H1	Supply to heat sink	G 6/4" F	1885	H2	Return from heat sink	G 6/4" F	335	<b>Control and safety</b>				C1	Temperature sensor	G 1/2" F	1490	C2	Temperature sensor	G 1/2" F	735	C3	Temperature sensor	G 1/2" F	1175	T	Thermometer	G 1/2" F	1270	P	Safety valve	G 1/2" F	550	<b>Universal inlet/outlet</b>				U1	Universal inlet/outlet	G 6/4" F	1475	U2	Universal inlet/outlet	G 6/4" F	535	U3	Universal inlet/outlet	G 6/4" F	1095	U4	Universal inlet/outlet	G 6/4" F	715	U5	Universal inlet/outlet	G 6/4" F	1255	<b>Solar thermal system</b>				X1	Inlet from solar thermal collector	G 1" F	940	X2	Return to solar thermal collector	G 1" F	335	<b>Flanges</b>				L1	Upper flange	12 x M12	1375
	pos.	description	connection	height [mm]																																																																																													
<b>Heat sources</b>																																																																																																	
B1	Supply from heat source	G 6/4" F	1475																																																																																														
B2	Return to heat source	G 6/4" F	335																																																																																														
<b>Heating system</b>																																																																																																	
H1	Supply to heat sink	G 6/4" F	1885																																																																																														
H2	Return from heat sink	G 6/4" F	335																																																																																														
<b>Control and safety</b>																																																																																																	
C1	Temperature sensor	G 1/2" F	1490																																																																																														
C2	Temperature sensor	G 1/2" F	735																																																																																														
C3	Temperature sensor	G 1/2" F	1175																																																																																														
T	Thermometer	G 1/2" F	1270																																																																																														
P	Safety valve	G 1/2" F	550																																																																																														
<b>Universal inlet/outlet</b>																																																																																																	
U1	Universal inlet/outlet	G 6/4" F	1475																																																																																														
U2	Universal inlet/outlet	G 6/4" F	535																																																																																														
U3	Universal inlet/outlet	G 6/4" F	1095																																																																																														
U4	Universal inlet/outlet	G 6/4" F	715																																																																																														
U5	Universal inlet/outlet	G 6/4" F	1255																																																																																														
<b>Solar thermal system</b>																																																																																																	
X1	Inlet from solar thermal collector	G 1" F	940																																																																																														
X2	Return to solar thermal collector	G 1" F	335																																																																																														
<b>Flanges</b>																																																																																																	
L1	Upper flange	12 x M12	1375																																																																																														

## DATA SHEET

## PSWF 1500 N+Thermal Store

Heat exchanger pressure drop graph

