


DATA SHEET

RBC 2000 Hot Water Storage Tank

	Main features	
	Application	Hot water tank intended for DHW heating, with integrated enamelled heat exchanger. It comes fitted with insulation and a magnesium anode rod that protects its inner surface from corrosion. As an option, an electronic anode rod can be installed instead of the magnesium one, for the codes see the Accessories table. If desired, an electric heating element can be installed into the hot water tank.
	Working fluid	water (tank), water, water/glycol mixture (max. 1:1) or water/glycerine (max. 2:1) (heat exchanger)
	Code	16711
Energy Efficiency Data (as per EC Regulation No. 812/2013)		
Energy efficiency class	N/A	
Standing loss	180 W	
Storage volume	1977 l	

Technical data	
Total tank volume	2006 l
Fluid volume in tank	1977 l
Heat exchanger (HE) volume	29 l
Heat exchanger surface area	4,5 m ²
Max. working temperature in tank	95 °C
Max. working temperature in HE	110 °C
Max. working pressure in tank	10 bar
Max. working pressure in HE	10 bar
Tank diameter	1100 mm
Tank diameter with insulation	1300 mm
Tank overall height	2550 mm
Tipping height	2870 mm
Empty weight	461 kg

Hot water heating from 10 °C to 45 °C at heating water inlet temp. of 60 °C	
Heat exchanger	1780 l/h (72 kW)

Materials	
Materials	S235JR, inner surface enamelled (DIN 4753-3)
Heat exchanger material	S235JR+N, outer surface enamelled (DIN 4753-3)
Tank perimeter insulation	fleece
Insulation's outer surface	PVC


Accessories	
El. heating element	models ETT-A, D, F, P, M
Heating elem. max. length	815 mm
Electronic anode rod	code 14429
Flange including anodes	code 17435

Spare parts (magnesium anode rods)	
Mg anode r. (A1), G 5/4"	code 3698
Mg anode r. – into flange (A2,3), G 5/4"	code 448
Mg anode r. – chain type, G 5/4"	code 13112

DATA SHEET

RBC 2000 Hot Water Storage Tank

Heat exchanger pressure drop

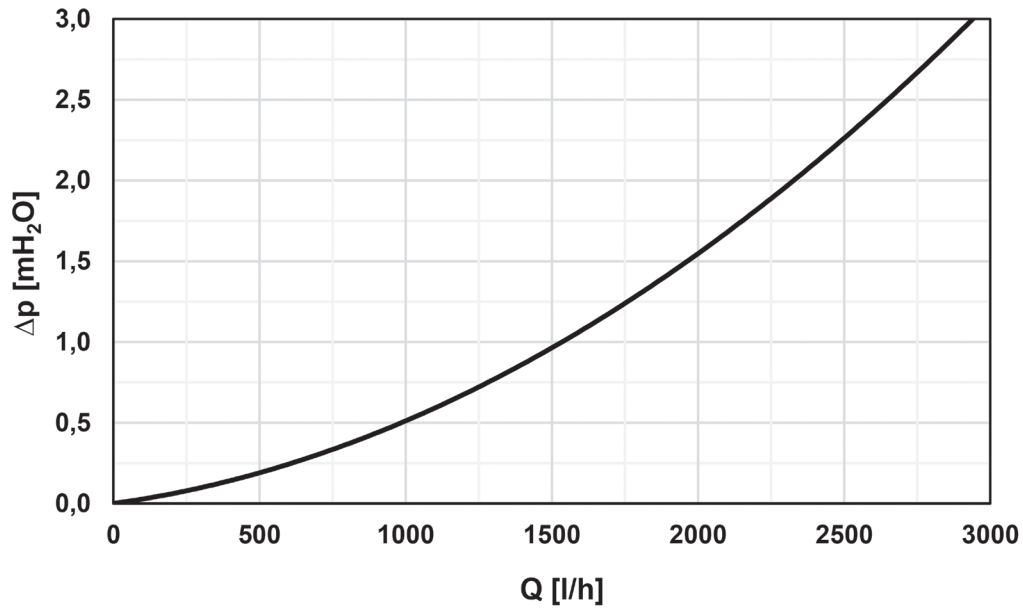

Dimensions

pos.	description	connection	height [mm]
DHW heating			
W1	cold water	G 2" F	340
W2	hot water	G 2" F	2210
W3	recirculation	G 1" F	1650
Auxiliary heat source			
E1	electric heating element	G 6/4" F	1310
Control and safety			
C1	temperature sensor	G 1/2" F	985
T	thermometer	G 1/2" F	2090
Heat sources			
X1	supply from heat source	G 5/4" F	1160
X2	return to heat source	G 5/4" F	460
Others			
L1	flange	8 x M10	550
A1	magnesium anode rod	G 5/4" F	2470
A2	magnesium anode rod	G 5/4" F	550

