

DATA SHEET

Sentinel Econiq S



Main Features

Description	HRV unit with integrated controller, equipped with a heat recovery exchanger, an electronic controlled motor and a touchscreen, summer bypass, protection against freezing and humidity sensor.
Application	Central HRV unit designed for ventilation of residential houses of living area up to 280 sqm.
Controller	Integrated in the unit, control panel located on its front.
Bypass	Automatic, based on the outdoor and indoor temperatures; it helps cool down inner space in the summer.
Code	21225

Performance Data

Max. air flow rate ^{*)}	414 m³/h
Heat recovery efficiency	max. 93 %

^{*)} Flow rates for specific installations shall be modified according to performance diagrams.

Electric Data

Power supply	220–240 V AC, 50 Hz
Power supply fuse	3 A (external fuse)
Unit fuse	2 A (internal fuse)
Nominal power input	max. 190 W
IP rating	IPX2

Dimensions, weight and installation

Height x width x depth	760 x 660 x 443 (without necks)
Spigot diameter	125 mm
Condensate hose	Ø 22 or 32 mm
Weight	27 kg
Mounting manner	on horizontal surface or wall hung

Ambient Conditions

Temperature (operation, storing)	–20 to 45 °C
Humidity (operation, storing)	up to 95 % r. v.

Accessories

Docking station for control module	code 20192
Module for connection to IR via CIB	code 17787

DATA SHEET

Sentinel Econiq S

Values of sound power levels and sound pressure levels at various air flow rates											
Speed	Test mode		Octave band frequency [Hz]								
			63	125	250	500	1000	2000	4000	8000	
20%	supply	Sound power level [dB]	50.3	49.0	36.0	31.5	23.6	16.1	18.9	25.3	18.9
	extract		52.9	50.9	46.8	43.0	34.6	27.1	19.2	25.4	26.4
	breakout		34.6	34.8	35.7	34.9	29.6	25.1	21.0	25.3	15.5
40%	supply		51.9	51.3	50.4	41.2	35.0	25.3	19.8	25.4	27.3
	extract		59.5	56.5	59.4	55.0	48.2	42.6	31.8	26.1	38.4
	breakout		40.2	42.6	46.5	45.4	41.0	36.2	25.5	25.3	26.0
60%	supply		60.6	60.3	54.2	49.5	44.4	36.2	27.9	26.3	34.2
	extract		66.9	62.4	63.3	62.0	57.9	53.5	43.4	34.2	45.7
	breakout		45.5	49.8	52.5	53.1	49.7	46.7	36.2	26.9	34.0
80%	supply		75.5	68.6	59.3	56.0	48.3	44.2	36.9	31.3	41.1
	extract		82.4	67.6	65.2	67.6	64.2	60.8	50.8	43.2	51.7
	breakout		59.2	55.0	56.8	60.0	55.4	53.9	44.4	33.4	40.5
100%	supply		72.4	70.5	60.5	56.4	49.8	46.3	39.0	33.4	42.0
	extract		79.4	69.6	66.6	75.1	64.9	63.6	53.4	45.7	56.2
	breakout		63.0	57.1	58.5	63.7	56.8	55.9	46.4	36.2	43.0

*) At 3 m.

Dependence of power input on volumetric air flow rate					
Q [m³/h]	102	170	203	305	406
P [W]	18.0	34.0	43.1	91.1	179.5

Product fiche according to the European Commission Regulation (EC) No. 1254/2014		
a)	Supplier's name or trade mark	Regulus
b)	Supplier's model identifier	Sentinel Econiq S
c)	Specific energy consumption (SEC) for Warm / Average / Cold climate	[kWh/(m².a)]
	class	A+
d)	Declared typology in accordance with Article 2 of this Regulation	RVU / BVU
e)	Type of drive installed or intended to be installed	variable speed
f)	Type of heat recovery system	recuperative
g)	Thermal efficiency of heat recovery	[%]
h)	Maximum flow rate*)	[m³/h]
i)	Electric power input of the fan drive, including any motor control equipment, at maximum flow rate	[W]
j)	Sound power level	[dB]
k)	Reference flow rate	[m³/h]
l)	Reference pressure difference	[Pa]
m)	SPI	[W/(m³/h)]
n)	Control factor / control typology	0.65/Local Demand Control
o)	Declared maximum internal / external leakage rates	[%]
q)	Position and description of visual filter warning	Refer to User Instructions
s)	Internet address for pre-/dis-assembly instructions	www.regulus.eu
v)	The annual electricity consumption (AEC)	[kWh/a]
w)	The annual heating saved (AHS) for Warm / Average / Cold climate	[kWh/a]**)

*) Value measured at 100 Pa static pressure as per the European Commission Regulation No. 1254/2014.


**) kWh of primary energy per year.

DATA SHEET


Sentinel Econiq S

Inlet / outlet marking


Left hand connection

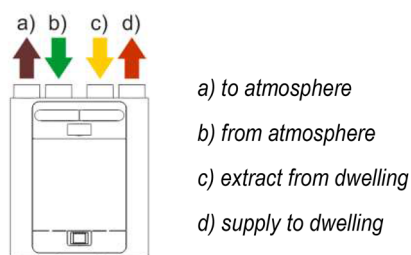


Right hand connection

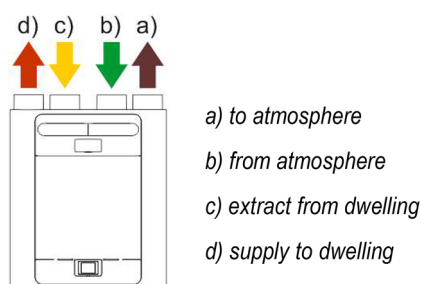


Dimensions

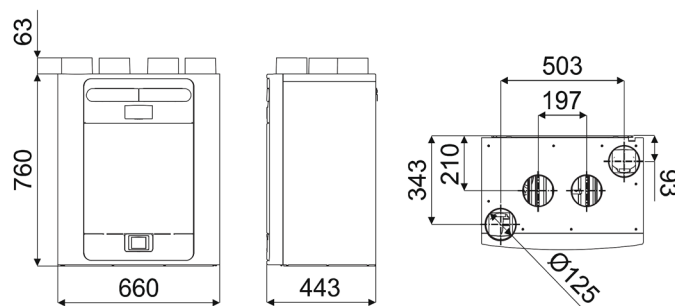

Graph of performance data

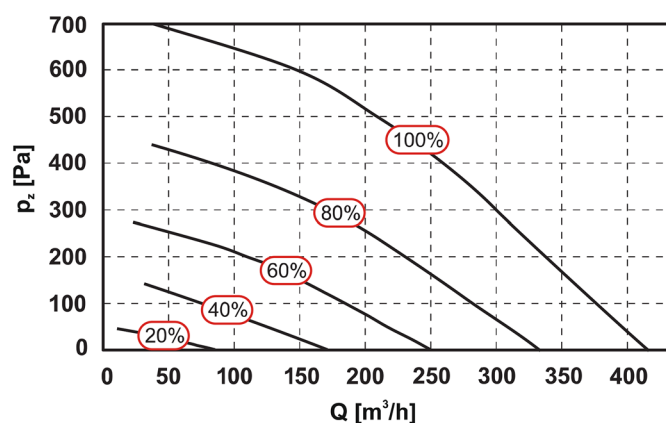


Graph of efficiency depending on airflow (EN 308)

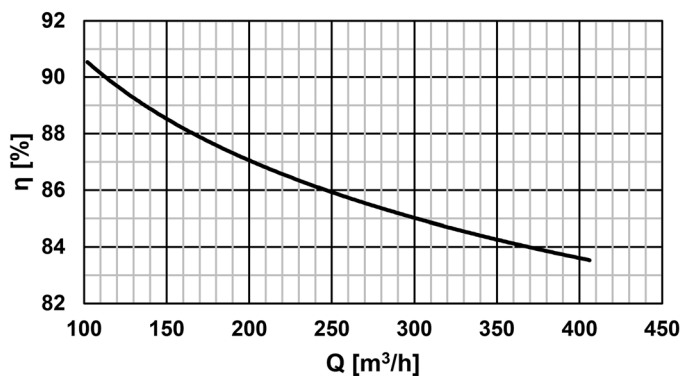

For $t_e = +5\text{ °C}$ and $t_i = +25\text{ °C}$.

Wiring of terminals and switches

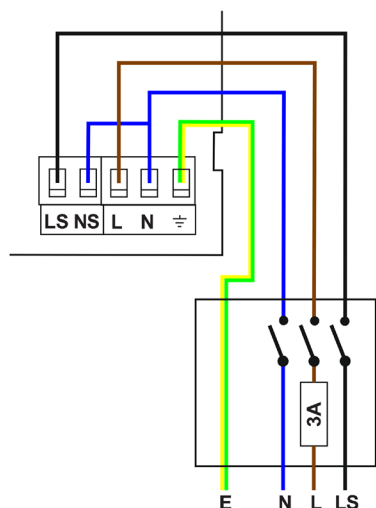

- LS ... mains live, 220 - 240 V AC, 50 Hz
- NS ... mains neutral, 220 - 240 V AC, 50 Hz
- L ... switched live, 220 - 240 V AC, 50 Hz
- N ... switched neutral, 220 - 240 V AC, 50 Hz
- E ... mains earth