

DATA SHEET

Econiq Se (with enthalpy heat exchanger)



Main Features

Description	Recuperation unit with integrated control with touch screen, equipped with enthalpy exchanger for heat and moisture recovery, electronically controlled motor, summer bypass, antifrost function and humidity sensor
Application	Central ventilation unit with heat and moisture recovery, intended for ventilation of family homes of living area up to 280 sqm.
Controller	Integrated in the unit, control panel located on its front.
Bypass	Automatic, based on the outdoor and indoor temperatures; it helps cool down inner space in the summer.
Code	21224

Performance Data

Max. air flow rate ^{*)}	414 m ³ /h
Heat recovery efficiency	max. 93 %

^{*)} Flow rates for specific installations shall be modified according to performance diagrams.

Electric Data

Power supply	220–240 V AC, 50 Hz
Power supply fuse	3 A (external fuse)
Unit fuse	2 A (internal fuse)
Nominal power input	max. 190 W
IP rating	IPX2

Dimensions, weight and installation

Height x width x depth	760 x 660 x 443 (without necks)
Spigot diameter	125 mm
Condensate hose	Ø 22 or 32 mm
Weight	27 kg
Mounting manner	on horizontal surface or wall hung

Ambient Conditions

Temperature (operation, storing)	–20 to 45 °C
Humidity (operation, storing)	up to 95 % r. v.

Accessories

Docking station for control module	code 20192
Module for connection to IR via CIB	code 17787

DATA SHEET

Econiq Se (with enthalpy heat exchanger)

Values of sound power levels and sound pressure levels at various air flow rates												
Speed	Test mode		Octave band frequency [Hz]									
			63	125	250	500	1000	2000	4000	8000		
20%	supply	Sound power level [dB]	50.3	49.0	36.0	31.5	23.6	16.1	18.9	25.3	Sound pressure level [dB] *)	18.9
	extract		52.9	50.9	46.8	43.0	34.6	27.1	19.2	25.4		26.4
	breakout		34.6	34.8	35.7	34.9	29.6	25.1	21.0	25.3		15.5
40%	supply		51.9	51.3	50.4	41.2	35.0	25.3	19.8	25.4		27.3
	extract		59.5	56.5	59.4	55.0	48.2	42.6	31.8	26.1		38.4
	breakout		40.2	42.6	46.5	45.4	41.0	36.2	25.5	25.3		26.0
60%	supply		60.6	60.3	54.2	49.5	44.4	36.2	27.9	26.3		34.2
	extract		66.9	62.4	63.3	62.0	57.9	53.5	43.4	34.2		45.7
	breakout		45.5	49.8	52.5	53.1	49.7	46.7	36.2	26.9		34.0
80%	supply		75.5	68.6	59.3	56.0	48.3	44.2	36.9	31.3		41.1
	extract		82.4	67.6	65.2	67.6	64.2	60.8	50.8	43.2		51.7
	breakout		59.2	55.0	56.8	60.0	55.4	53.9	44.4	33.4		40.5
100%	supply		72.4	70.5	60.5	56.4	49.8	46.3	39.0	33.4		42.0
	extract		79.4	69.6	66.6	75.1	64.9	63.6	53.4	45.7		56.2
	breakout		63.0	57.1	58.5	63.7	56.8	55.9	46.4	36.2		43.0

*) At 3 m.

Dependence of power input on volumetric air flow rate					
Q [m³/h]	102	170	203	305	406
P [W]	18.0	34.0	43.1	91.1	179.5

Product fiche according to the European Commission Regulation (EC) No. 1254/2014		
a)	Supplier's name or trade mark	– Regulus
b)	Supplier's model identifier	– Sentinel Econiq Se
c)	Specific energy consumption (SEC) for Warm / Average / Cold climate	[kWh/(m².a)] –17.27/–42.64/–87.72
		class A+
d)	Declared typology in accordance with Article 2 of this Regulation	– RVU / BVU
e)	Type of drive installed or intended to be installed	– variable speed
f)	Type of heat recovery system	– recuperative
g)	Thermal efficiency of heat recovery	[%] 93
h)	Maximum flow rate*)	[m³/h] 350
i)	Electric power input of the fan drive, including any motor control equipment, at maximum flow rate	[W] 166
j)	Sound power level	[dB] 48.5
k)	Reference flow rate	[m³/h] 0.068
l)	Reference pressure difference	[Pa] 50
m)	SPI	[W/(m³/h)] 0.31
n)	Control factor / control typology	– 0.65/Local Demand Control
o)	Declared maximum internal / external leakage rates	[%] <5/<5
q)	Position and description of visual filter warning	– Refer to User Instructions
s)	Internet address for pre-/dis-assembly instructions	– www.regulus.eu
v)	The annual electricity consumption (AEC)	[kWh/a] 2.07
w)	The annual heating saved (AHS) for Warm / Average / Cold climate	[kWh/a]**) 21.32/47.14/92.22

*) Value measured at 100 Pa static pressure as per the European Commission Regulation No. 1254/2014.


**) kWh of primary energy per year.

DATA SHEET


Econiq Se (with enthalpy heat exchanger)

Inlet / outlet marking


Left hand connection

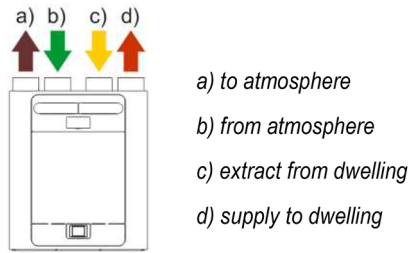


Right hand connection

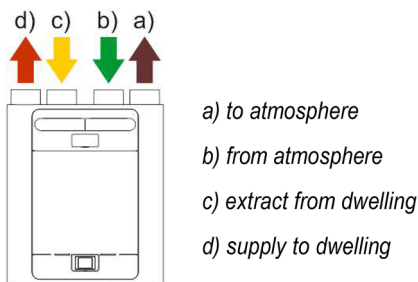


Dimensions

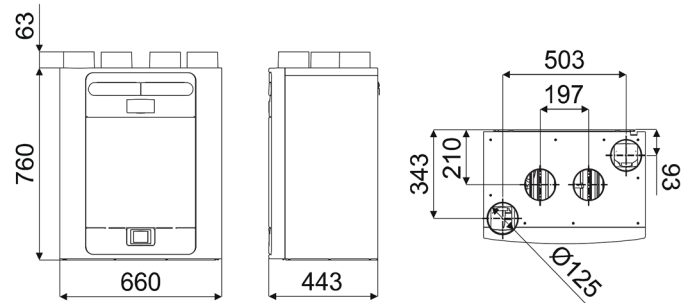


Graph of performance data

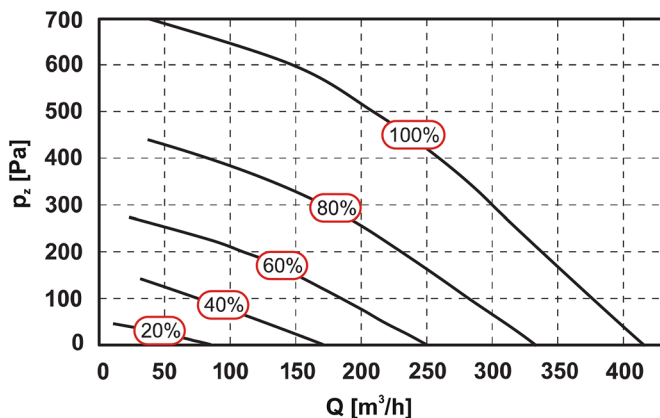

Graph of efficiency depending on airflow (EN 308)

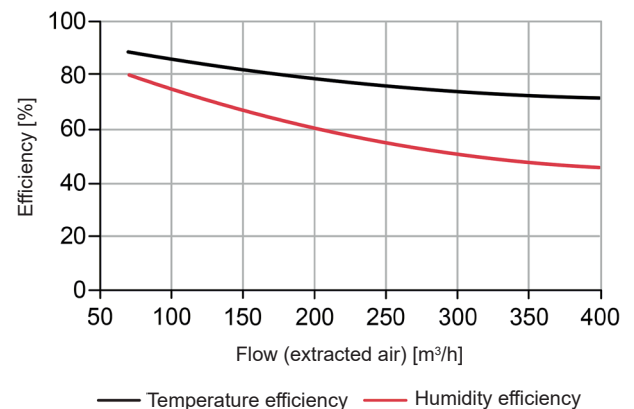

Wiring of terminals and switches

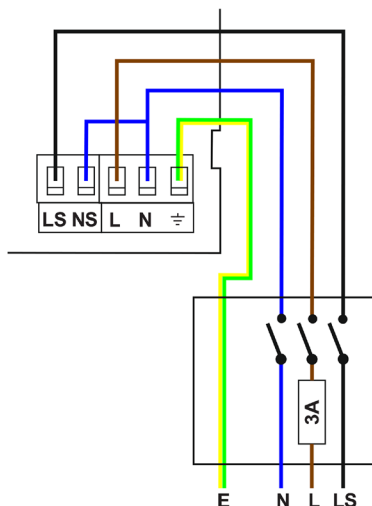

- LS** ... mains live, 220 - 240 V AC, 50 Hz
- NS** ... mains neutral, 220 - 240 V AC, 50 Hz
- L** ... switched live, 220 - 240 V AC, 50 Hz
- N** ... switched neutral, 220 - 240 V AC, 50 Hz
- E** ... mains earth